

HYBRID STEPPER MOTOR

TYPE : 42HS48-1004A05-D24

Step Angle

$1.8 \pm 5\%$

Phase No

2

Insulation Resistance



100M Ω (500VDC)

Insulation Class

B

Specifications

Wiring Diagram

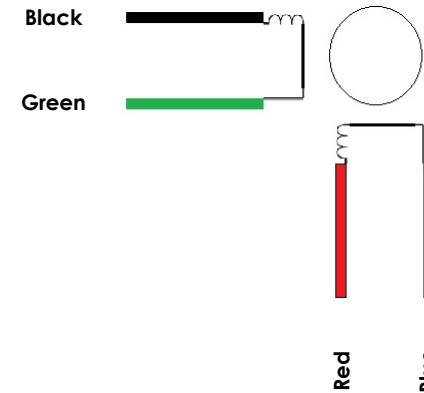

Connection Type

Parallel

Series

Unipolar

Holding Torque

0,5 Nm

Current

1,0 A

Resistance

$4,5 \pm 10\% \Omega$

Inductance

$10 \pm 20\% \text{mH}$

Dimensions (mm)

