

HYBRID STEPPER MOTOR

TYPE : 86HS156-5608A15875-B32

Step Angle

1.8° ± 5%

Phase No

4

Insulation Resistance





100MΩ (500VDC)

Insulation Class

B

Specifications

Wiring Diagram

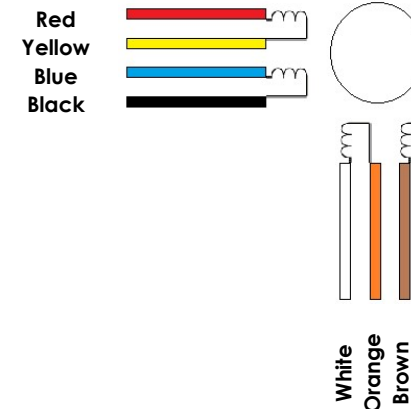

Connection Type

Parallel

Series

Unipolar

Holding Torque

12 Nm

12 Nm

8,5 Nm

Current

5,6 A

2,8 A

4,0 A

Resistance

0,65 ± 10% Ω

2,6 ± 10% Ω

1,3 ± 10% Ω

Inductance

9,0 ± 20% mH

36 ± 20% mH

9,0 ± 20% mH

Dimensions (mm)

